


**d 15~32mm**

d	Boundary dimensions						Basic load ratings				Limiting speeds		Bearing numbers	Mass kg (approx.)
	D	T	B	C	r <sub>s min</sub>	r <sub>1s min</sub>	dynamic kN	static kN	dynamic kgf	static kgf	grease min <sup>-1</sup>	oil min <sup>-1</sup>		
<b>15</b>	42	14.25	13	11	1.0	1.0	23.2	20.8	2 370	2 120	9 900	13 000	<b>30302JR</b>	0.098
<b>17</b>	40	13.25	12	11	1.0	1.0	20.5	20.3	2 090	2 070	9 900	13 000	<b>30203JR</b>	0.080
	40	17.25	16	14	1.0	1.0	27.3	28.3	2 790	2 880	9 900	13 000	<b>32203JR</b>	0.102
	47	15.25	14	12	1.0	1.0	28.9	26.3	2 940	2 680	9 000	12 000	<b>30303JR</b>	0.134
<b>20</b>	42	15.00	15	12	0.6	0.6	24.9	27.9	2 540	2 840	9 500	13 000	<b>32004JR</b>	0.097
	47	15.25	14	12	1.0	1.0	28.2	28.7	2 870	2 930	8 800	12 000	<b>30204JR</b>	0.127
	47	19.25	18	15	1.0	1.0	36.5	39.5	3 700	4 000	8 800	12 000	<b>32204JR</b>	0.160
	52	16.25	16	13	1.5	1.5	35.5	34.0	3 600	3 450	8 000	11 000	<b>30304JR</b>	0.176
	52	22.25	21	18	1.5	1.5	46.5	48.5	4 750	4 950	8 000	11 000	<b>32304JR</b>	0.245
<b>22</b>	44	15.00	15	11.5	0.6	0.6	27.0	31.5	2 760	3 250	8 900	12 000	<b>320/22JR</b>	0.106
<b>25</b>	47	15.00	15	11.5	0.6	0.6	27.8	33.5	2 830	3 450	7 900	11 000	<b>32005JR</b>	0.114
	47	17.00	17	14	0.6	0.6	32.5	40.5	3 300	4 150	8 000	11 000	<b>33005JR</b>	0.130
	52	16.25	15	13	1.0	1.0	31.5	34.0	3 200	3 450	7 300	9 800	<b>30205JR</b>	0.154
	52	19.25	18	16	1.0	1.0	42.0	47.0	4 300	4 800	7 300	9 800	<b>32205JR</b>	0.187
	52	22.00	22	18	1.0	1.0	47.5	57.5	4 850	5 850	7 300	9 800	<b>33205JR</b>	0.217
	62	18.25	17	15	1.5	1.5	48.5	47.5	4 950	4 850	6 700	8 900	<b>30305JR</b>	0.272
	62	18.25	17	13	1.5	1.5	40.5	43.5	4 150	4 450	5 900	7 800	<b>30305DJR</b>	0.284
62	25.25	24	20	1.5	1.5	61.5	64.5	6 250	6 600	6 700	8 900	<b>32305JR</b>	0.381	
<b>28</b>	52	16.00	16	12	1.0	1.0	33.0	40.5	3 400	4 150	7 300	9 700	<b>320/28JR</b>	0.146
<b>30</b>	55	17.00	17	13	1.0	1.0	37.5	46.0	3 800	4 700	6 900	9 200	<b>32006JR</b>	0.166
	55	20.00	20	16	1.0	1.0	42.5	54.0	4 300	5 500	6 900	9 200	<b>33006JR</b>	0.201
	62	17.25	16	14	1.0	1.0	43.5	48.0	4 450	4 900	6 300	8 400	<b>30206JR</b>	0.241
	62	21.25	20	17	1.0	1.0	54.5	64.0	5 600	6 550	6 300	8 400	<b>32206JR</b>	0.301
	62	25.00	25	19.5	1.0	1.0	65.0	77.0	6 600	7 850	6 300	8 400	<b>33206JR</b>	0.344
	72	20.75	19	16	1.5	1.5	60.0	61.0	6 100	6 200	5 700	7 600	<b>30306JR</b>	0.408
	72	20.75	19	14	1.5	1.5	48.5	51.5	4 950	5 250	5 000	6 700	<b>30306DJR</b>	0.398
72	28.75	27	23	1.5	1.5	81.0	90.0	8 250	9 150	5 700	7 600	<b>32306JR</b>	0.583	
<b>32</b>	58	17.00	17	13	1.0	1.0	37.0	46.5	3 750	4 750	6 600	8 700	<b>320/32JR</b>	0.181


# Tapered Roller Bearings

## Metric Series

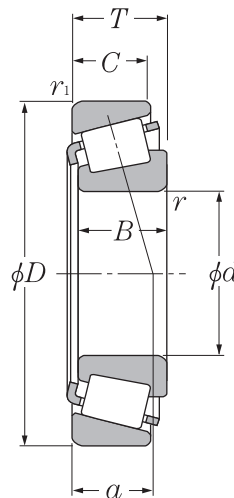

### d 35~50mm

d	Boundary dimensions						Basic load ratings				Limiting speeds		Bearing numbers	Mass kg (approx.)
	D	T	B	C	$r_{s\ min}$	$r_{1s\ min}$	dynamic kN	static kN	dynamic kgf	static kgf	grease	oil		
35	62	18.00	18	14	1.0	1.0	41.5	52.5	4 250	5 350	6 100	8 100	<b>32007JR</b>	0.224
	62	21.00	21	17	1.0	1.0	50.5	66.5	5 150	6 800	6 100	8 100	<b>33007JR</b>	0.263
	72	18.25	17	15	1.5	1.5	55.5	61.5	5 650	6 250	5 500	7 400	<b>30207JR</b>	0.344
	72	24.25	23	19	1.5	1.5	72.5	87.0	7 400	8 900	5 500	7 400	<b>32207JR</b>	0.457
	72	28.00	28	22	1.5	1.5	87.5	109	8 900	11 200	5 500	7 400	<b>33207JR</b>	0.531
	80	22.75	21	18	2.0	1.5	75.0	77.0	7 650	7 900	5 000	6 600	<b>30307JR</b>	0.540
	80	22.75	21	15	2.0	1.5	63.5	70.0	6 450	7 100	4 400	5 800	<b>30307DJR</b>	0.530
	80	32.75	31	25	2.0	1.5	101	115	10 300	11 700	5 000	6 600	<b>32307JR</b>	0.787
40	68	19.00	19	14.5	1.0	1.0	50.0	65.5	5 100	6 650	5 300	7 100	<b>32008JR</b>	0.273
	68	22.00	22	18	1.0	1.0	59.5	82.5	6 050	8 400	5 300	7 100	<b>33008JR</b>	0.312
	75	26.00	26	20.5	1.5	1.5	79.5	103	8 100	10 500	5 200	6 900	<b>33108JR</b>	0.494
	80	19.75	18	16	1.5	1.5	61.0	67.0	6 250	6 850	4 900	6 600	<b>30208JR</b>	0.435
	80	24.75	23	19	1.5	1.5	79.5	93.5	8 100	9 550	4 900	6 600	<b>32208JR</b>	0.558
	80	32.00	32	25	1.5	1.5	103	132	10 500	13 400	4 900	6 600	<b>33208JR</b>	0.728
	90	25.25	23	20	2.0	1.5	91.5	102	9 350	10 400	4 400	5 900	<b>30308JR</b>	0.769
	90	25.25	23	17	2.0	1.5	77.0	85.5	7 850	8 700	3 900	5 200	<b>30308DJR</b>	0.738
	90	35.25	33	27	2.0	1.5	110	140	11 300	14 300	4 200	5 600	<b>32308JR</b>	1.100
45	75	20.00	20	15.5	1.0	1.0	57.5	76.5	5 850	7 800	4 800	6 400	<b>32009JR</b>	0.346
	75	24.00	24	19	1.0	1.0	66.0	93.5	6 750	9 550	4 800	6 400	<b>33009JR</b>	0.398
	80	26.00	26	20.5	1.5	1.5	84.5	115	8 650	11 700	4 700	6 200	<b>33109JR</b>	0.542
	85	20.75	19	16	1.5	1.5	67.5	78.5	6 900	8 000	4 400	5 900	<b>30209JR</b>	0.495
	85	24.75	23	19	1.5	1.5	82.0	100	8 350	10 200	4 400	5 900	<b>32209JR</b>	0.607
	85	32.00	32	25	1.5	1.5	107	141	10 900	14 400	4 400	5 900	<b>33209JR</b>	0.783
	100	27.25	25	22	2.0	1.5	111	126	11 300	12 800	4 000	5 300	<b>30309JR</b>	1.010
	100	27.25	25	18	2.0	1.5	96.0	109	9 800	11 100	3 500	4 600	<b>30309DJR</b>	0.958
	100	38.25	36	30	2.0	1.5	154	191	15 700	19 500	4 000	5 300	<b>32309JR</b>	1.460
50	80	20.00	20	15.5	1.0	1.0	62.5	88.0	6 400	9 000	4 400	5 800	<b>32010JR</b>	0.366
	80	24.00	24	19	1.0	1.0	69.5	103	7 100	10 500	4 400	5 800	<b>33010JR</b>	0.433
	85	26.00	26	20	1.5	1.5	86.5	121	8 850	12 400	4 200	5 600	<b>33110JR</b>	0.580
	90	21.75	20	17	1.5	1.5	77.0	93.0	7 850	9 450	4 000	5 300	<b>30210JR</b>	0.563
	90	24.75	23	19	1.5	1.5	87.5	109	8 900	11 100	4 000	5 300	<b>32210JR</b>	0.648
	90	32.00	32	24.5	1.5	1.5	115	158	11 700	16 100	4 000	5 300	<b>33210JR</b>	0.852
	110	29.25	27	23	2.5	2.0	133	152	13 500	15 500	3 600	4 800	<b>30310JR</b>	1.310
	110	29.25	27	19	2.5	2.0	113	130	11 600	13 300	3 200	4 200	<b>30310DJR</b>	1.250
	110	42.25	40	33	2.5	2.0	184	232	18 700	23 600	3 600	4 800	<b>32310JR</b>	1.920

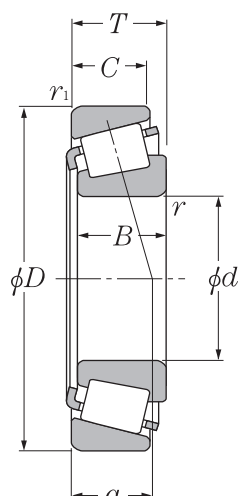


**d 55~70mm**

d	Boundary dimensions						Basic load ratings				Limiting speeds		Bearing numbers	Mass kg (approx.)
	mm						dynamic	static	dynamic	static	min <sup>-1</sup>			
	D	T	B	C	r <sub>s min</sub>	r <sub>1s min</sub>	C <sub>r</sub>	C <sub>or</sub>	C <sub>r</sub>	C <sub>or</sub>	grease	oil		
<b>55</b>	90	23.00	23	17.5	1.5	1.5	80.5	118	8 200	12 000	4 000	5 400	<b>32011JR</b>	0.563
	90	27.00	27	21	1.5	1.5	91.5	138	9 350	14 100	4 000	5 400	<b>33011JR</b>	0.643
	95	30.00	30	23	1.5	1.5	111	155	11 300	15 800	3 900	5 200	<b>33111JR</b>	0.846
	100	22.75	21	18	2.0	1.5	93.0	111	9 500	11 300	3 600	4 900	<b>30211JR</b>	0.740
	100	26.75	25	21	2.0	1.5	108	134	11 000	13 700	3 600	4 900	<b>32211JR</b>	0.876
	100	35.00	35	27	2.0	1.5	138	188	14 100	19 100	3 600	4 900	<b>33211JR</b>	1.150
	120	31.50	29	25	2.5	2.0	155	179	15 800	18 300	3 300	4 400	<b>30311JR</b>	1.660
	120	31.50	29	21	2.5	2.0	132	154	13 500	15 700	2 900	3 800	<b>30311DJR</b>	1.590
120	45.50	43	35	2.5	2.0	215	275	21 900	28 000	3 300	4 400	<b>32311JR</b>	2.440	
<b>60</b>	95	23.00	23	17.5	1.5	1.5	82.0	123	8 350	12 500	3 700	4 900	<b>32012JR</b>	0.576
	95	27.00	27	21	1.5	1.5	93.5	145	9 550	14 700	3 700	4 900	<b>33012JR</b>	0.684
	100	30.00	30	23	1.5	1.5	113	164	11 600	16 700	3 600	4 700	<b>33112JR</b>	0.912
	110	23.75	22	19	2.0	1.5	105	125	10 700	12 700	3 400	4 500	<b>30212JR</b>	0.949
	110	29.75	28	24	2.0	1.5	130	164	13 200	16 800	3 400	4 500	<b>32212JR</b>	1.180
	110	38.00	38	29	2.0	1.5	161	223	16 400	22 700	3 400	4 500	<b>33212JR</b>	1.550
	130	33.50	31	26	3.0	2.5	180	210	18 300	21 400	3 000	4 000	<b>30312JR</b>	2.060
	130	33.50	31	22	3.0	2.5	150	176	15 300	17 900	2 700	3 600	<b>30312DJR</b>	1.970
130	48.50	46	37	3.0	2.5	244	315	24 900	32 000	3 000	4 000	<b>32312JR</b>	3.020	
<b>65</b>	100	23.00	23	17.5	1.5	1.5	83.0	128	8 450	13 000	3 400	4 600	<b>32013JR</b>	0.630
	100	27.00	27	21	1.5	1.5	97.5	156	9 950	16 000	3 400	4 600	<b>33013JR</b>	0.732
	110	34.00	34	26.5	1.5	1.5	144	211	14 700	21 500	3 300	4 400	<b>33113JR</b>	1.280
	120	24.75	23	20	2.0	1.5	123	148	12 500	15 000	3 100	4 200	<b>30213JR</b>	1.180
	120	32.75	31	27	2.0	1.5	159	206	16 200	21 000	3 100	4 200	<b>32213JR</b>	1.580
	120	41.00	41	32	2.0	1.5	195	265	19 900	27 100	3 100	4 200	<b>33213JR</b>	1.980
	140	36.00	33	28	3.0	2.5	203	238	20 700	24 300	2 800	3 700	<b>30313JR</b>	2.550
	140	36.00	33	23	3.0	2.5	173	204	17 700	20 900	2 500	3 300	<b>30313DJR</b>	2.420
140	51.00	48	39	3.0	2.5	273	350	27 800	36 000	2 800	3 700	<b>32313JR</b>	3.660	
<b>70</b>	110	25.00	25	19	1.5	1.5	105	160	10 700	16 400	3 200	4 200	<b>32014JR</b>	0.630
	110	31.00	31	25.5	1.5	1.5	127	204	12 900	20 800	3 200	4 200	<b>33014JR</b>	0.732
	125	26.25	24	21	2.0	1.5	131	162	13 400	16 500	2 900	3 900	<b>30214JR</b>	1.280
	125	33.25	31	27	2.0	1.5	166	220	16 900	22 400	2 900	3 900	<b>32214JR</b>	1.180
	125	41.00	41	32	2.0	1.5	201	282	20 500	28 700	2 900	3 900	<b>33214JR</b>	1.580
	150	38.00	35	30	3.0	2.5	230	272	23 400	27 800	2 600	3 500	<b>30314JR</b>	2.550
	150	38.00	35	25	3.0	2.5	193	229	19 600	23 300	2 300	3 000	<b>30314DJR</b>	2.420
	150	54.00	51	42	3.0	2.5	310	405	31 500	41 000	2 600	3 500	<b>32314JR</b>	3.660

# Tapered Roller Bearings




## Metric Series

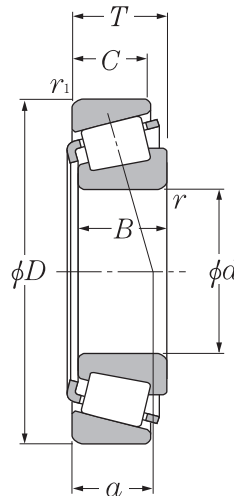

### d 75~90mm

d	Boundary dimensions						Basic load ratings				Limiting speeds		Bearing numbers	Mass kg (approx.)
	D	T	B	C	$r_{s\ min}$	$r_{1s\ min}$	dynamic kN	static	dynamic kgf	static	grease	oil		
75	115	25.00	25	19	1.5	1.5	106	167	10 800	17 000	3 000	4 000	<b>32015JR</b>	0.909
	115	31.00	31	25.5	1.5	1.5	111	186	11 300	19 000	3 000	4 000	<b>33015JR</b>	1.110
	130	27.25	25	22	2.0	1.5	139	175	14 200	17 900	2 700	3 600	<b>30215JR</b>	1.410
	130	33.25	31	27	2.0	1.5	168	224	17 100	22 800	2 700	3 600	<b>32215JR</b>	1.740
	130	41.00	41	31	2.0	1.5	208	298	21 200	30 500	2 700	3 600	<b>33215JR</b>	2.200
	160	40.00	37	31	3.0	2.5	255	305	26 000	31 000	2 400	3 200	<b>30315JR</b>	3.570
	160	40.00	37	26	3.0	2.5	215	256	21 900	26 100	2 100	2 800	<b>30315DJR</b>	3.470
160	58.00	55	45	3.0	2.5	355	470	36 000	47 500	2 400	3 200	<b>32315JR</b>	5.350	
80	125	29.00	29	22	1.5	1.5	139	216	14 200	22 000	2 800	3 700	<b>32016JR</b>	1.280
	125	36.00	36	29.5	1.5	1.5	173	284	17 600	29 000	2 800	3 700	<b>33016JR</b>	1.600
	140	28.25	26	22	2.5	2.0	160	200	16 300	20 400	2 500	3 400	<b>30216JR</b>	1.720
	140	35.25	33	28	2.5	2.0	199	265	20 300	27 000	2 500	3 400	<b>32216JR</b>	2.180
	140	46.00	46	35	2.5	2.0	250	365	25 500	37 500	2 500	3 400	<b>33216JR</b>	2.920
	170	42.50	39	33	3.0	2.5	291	350	29 700	36 000	2 300	3 000	<b>30316JR</b>	4.410
	170	42.50	39	27	3.0	2.5	236	283	24 100	28 900	2 000	2 700	<b>30316DJR</b>	4.110
170	61.50	58	48	3.0	2.5	395	525	40 500	53 500	2 300	3 000	<b>32316JR</b>	6.410	
85	130	29.00	29	22	1.5	1.5	142	224	14 400	22 900	2 600	3 500	<b>32017JR</b>	1.350
	130	36.00	36	29.5	1.5	1.5	176	296	18 000	30 000	2 600	3 500	<b>33017JR</b>	1.700
	150	30.50	28	24	2.5	2.0	183	232	18 600	23 600	2 400	3 200	<b>30217JR</b>	2.140
	150	38.50	36	30	2.5	2.0	224	300	22 900	30 500	2 400	3 200	<b>32217JR</b>	2.750
	150	49.00	49	37	2.5	2.0	284	420	29 000	43 000	2 400	3 200	<b>33217JR</b>	3.580
	180	44.50	41	34	4.0	3.0	305	365	31 000	37 000	2 100	2 900	<b>30317JR</b>	5.200
	180	44.50	41	28	4.0	3.0	247	293	25 200	29 900	1 900	2 500	<b>30317DJR</b>	4.850
180	63.50	60	49	4.0	3.0	405	525	41 000	53 500	2 100	2 900	<b>32317JR</b>	7.150	
90	140	32.00	32	24	2.0	1.5	168	270	17 200	27 600	2 500	3 300	<b>32018JR</b>	1.790
	140	39.00	39	32.5	2.0	1.5	215	360	21 900	36 500	2 500	3 300	<b>33018JR</b>	2.180
	160	32.50	30	26	2.5	2.0	208	267	21 200	27 200	2 200	3 000	<b>30218JR</b>	2.660
	160	42.50	40	34	2.5	2.0	262	360	26 700	36 500	2 200	3 000	<b>32218JR</b>	3.490
	190	46.50	43	36	4.0	3.0	335	405	34 500	41 500	2 000	2 700	<b>30318JR</b>	6.030
	190	46.50	43	30	4.0	3.0	270	320	27 600	33 000	1 800	2 400	<b>30318DJR</b>	5.660
	190	67.50	64	53	4.0	3.0	450	595	46 000	60 500	2 000	2 700	<b>32318JR</b>	8.570

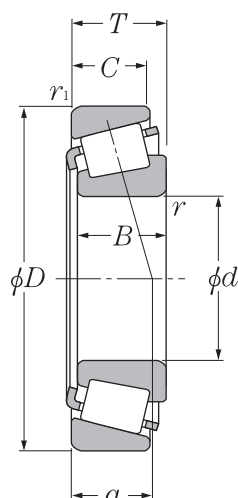


### d 95~120mm

d	Boundary dimensions						Basic load ratings				Limiting speeds		Bearing numbers	Mass kg (approx.)
	D	T	B	C	$r_{s\ min}$	$r_{1s\ min}$	dynamic kN	static kN	dynamic kgf	static kgf	grease	oil		
<b>95</b>	145	32.00	32	24	2.0	1.5	171	280	17 500	28 600	2 300	3 100	<b>32019JR</b>	1.830
	145	39.00	39	32.5	2.0	1.5	219	375	22 400	38 000	2 300	3 100	<b>33019JR</b>	2.270
	170	34.50	32	27	3.0	2.5	226	290	23 000	29 600	2 100	2 800	<b>30219JR</b>	3.070
	170	45.50	43	37	3.0	2.5	299	415	30 500	42 500	2 100	2 800	<b>32219JR</b>	4.300
	200	49.50	45	38	4.0	3.0	365	445	37 500	45 500	1 900	2 500	<b>30319JR</b>	6.980
	200	49.50	45	32	4.0	3.0	296	355	30 000	36 500	1 700	2 200	<b>30319DJR</b>	6.470
	200	71.50	67	55	4.0	3.0	505	670	51 500	68 500	1 900	2 500	<b>32319JR</b>	10.100
<b>100</b>	150	32.00	32	24	2.0	1.5	170	281	17 300	28 600	2 200	3 000	<b>32020JR</b>	1.910
	150	39.00	39	32.5	2.0	1.5	224	390	22 800	39 500	2 200	3 000	<b>33020JR</b>	2.370
	180	37.00	34	29	3.0	2.5	258	335	26 300	34 500	2 000	2 700	<b>30220JR</b>	3.780
	180	49.00	46	39	3.0	2.5	330	465	33 500	47 500	2 000	2 700	<b>32220JR</b>	5.120
	215	51.50	47	39	4.0	3.0	410	500	41 500	51 000	1 800	2 400	<b>30320JR</b>	8.560
	215	56.50	51	35	4.0	3.0	355	435	36 000	44 000	1 800	2 400	<b>31320JR</b>	8.670
<b>105</b>	160	35.00	35	26	2.5	2.0	201	335	20 500	34 000	2 100	2 800	<b>32021JR</b>	2.420
	160	43.00	43	34	2.5	2.0	245	420	25 000	43 000	2 100	2 800	<b>33021JR</b>	3.000
	190	39.00	36	30	3.0	2.5	287	380	29 300	38 500	1 900	2 500	<b>30221JR</b>	4.390
	190	53.00	50	43	3.0	2.5	380	540	38 500	55 500	1 900	2 500	<b>32221JR</b>	6.250
	225	53.50	49	41	4.0	3.0	435	530	44 500	54 500	1 700	2 300	<b>30321JR</b>	9.790
	225	58.00	53	36	4.0	3.0	380	470	39 000	47 500	1 700	2 300	<b>31321JR</b>	9.680
<b>110</b>	170	38.00	38	29	2.5	2.0	236	390	24 000	39 500	2 000	2 700	<b>32022JR</b>	3.070
	170	47.00	47	37	2.5	2.0	288	500	29 400	51 000	2 000	2 700	<b>33022JR</b>	3.800
	200	41.00	38	32	3.0	2.5	325	435	33 000	44 000	1 800	2 400	<b>30222JR</b>	5.180
	200	56.00	53	46	3.0	2.5	420	605	43 000	62 000	1 800	2 400	<b>32222JR</b>	7.430
	240	54.50	50	42	4.0	3.0	480	590	49 000	60 000	1 600	2 200	<b>30322JR</b>	11.400
	240	63.00	57	38	4.0	3.0	430	535	44 000	54 500	1 600	2 200	<b>31322JR</b>	11.900
<b>120</b>	180	38.00	38	29	2.5	2.0	245	420	25 000	43 000	1 800	2 500	<b>32024JR</b>	3.250
	215	43.50	40	34	3.0	2.5	345	470	35 500	48 000	1 700	2 200	<b>30224JR</b>	6.230
	215	61.50	58	50	3.0	2.5	460	680	47 000	69 500	1 700	2 200	<b>32224JR</b>	9.080
	260	59.50	55	46	4.0	3.0	560	695	57 000	71 000	1 500	2 000	<b>30324JR</b>	14.200
	260	68.00	62	42	4.0	3.0	515	655	52 500	67 000	1 500	2 000	<b>31324JR</b>	15.400
	260	90.50	86	69	4.0	3.0	815	1 130	83 000	116 000	1 500	2 000	<b>32324JR</b>	22.400

# Tapered Roller Bearings

## Metric Series

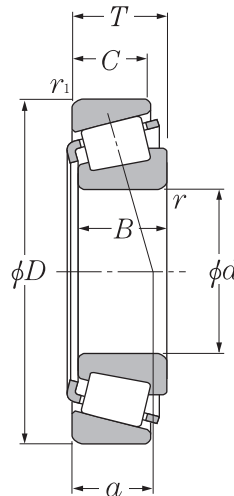

### d 130~150mm

d	Boundary dimensions						Basic load ratings				Limiting speeds		Bearing numbers	Mass kg (approx.)
	D	T	B	C	$r_{s\ min}$	$r_{1s\ min}$	dynamic kN	static kN	dynamic kgf	static kgf	grease	oil		
<b>130</b>	200	45.00	45	34	2.5	2.0	320	545	32 500	55 500	1 700	2 200	<b>32026JR</b>	4.960
	230	43.75	40	34	4.0	3.0	375	505	38 000	51 500	1 500	2 000	<b>30226JR</b>	7.250
	230	67.75	64	54	4.0	3.0	530	815	54 000	83 000	1 500	2 000	<b>32226JR</b>	11.200
	280	63.75	58	49	5.0	4.0	650	830	66 000	84 500	1 400	1 800	<b>30326JR</b>	17.400
	280	72.00	66	44	5.0	4.0	600	780	61 500	79 500	1 400	1 800	<b>31326JR</b>	19.000
<b>140</b>	210	45.00	45	34	2.5	2.0	330	580	33 500	59 500	1 600	2 100	<b>32028JR</b>	5.280
	250	45.75	42	36	4.0	3.0	420	570	43 000	58 500	1 400	1 900	<b>30228JR</b>	9.260
	250	71.75	68	58	4.0	3.0	610	920	62 500	94 000	1 400	1 900	<b>32228JR</b>	8.370
	300	67.75	62	53	5.0	4.0	735	950	75 000	97 000	1 300	1 700	<b>30328JR</b>	21.200
	300	77.00	70	47	5.0	4.0	685	905	70 000	92 500	1 300	1 700	<b>31328JR</b>	23.000
<b>150</b>	225	48.00	48	36	3.0	2.5	370	655	37 500	67 000	1 400	1 900	<b>32030JR</b>	6.370
	270	49.00	45	38	4.0	3.0	450	605	46 000	61 500	1 300	1 700	<b>30230JR</b>	11.200
	270	77.00	73	60	4.0	3.0	700	1070	71 500	109 000	1 300	1 700	<b>32230JR</b>	18.200
	320	72.00	65	55	5.0	4.0	825	1070	84 000	109 000	1 200	1 600	<b>30330JR</b>	25.500
	320	82.00	75	50	5.0	4.0	775	1030	79 000	105 000	1 200	1 600	<b>31330JR</b>	27.700