




Open type




Shielded type
(ZZ)



Contact
sealed type
(LLU)



With snap
ring groove




With snap ring


d 10~22mm

d	Boundary dimensions			Basic load ratings				Limiting speeds		Bearing numbers					Mass kg (approx.)
	mm			dynamic	static	dynamic	static	min ⁻¹		open type	shielded type	sealed type	snap ring groove	snap ring	
	D	B	r _{s min}	C _r	C _{or}	C _r	C _{or}	grease	oil						
10	19	5	0.3	1.830	0.925	187	94	32 000	38 000	6800	ZZ	LLU	—	—	0.005
	22	6	0.3	2.700	1.270	275	129	30 000	36 000	6900	ZZ	LLU	—	—	0.009
	26	8	0.3	4.550	1.960	465	200	29 000	34 000	6000	ZZ	LLU	—	—	0.019
	30	9	0.6	5.100	2.390	520	244	25 000	30 000	6200	ZZ	LLU	—	—	0.032
	35	11	0.6	8.200	3.500	835	355	23 000	27 000	6300	ZZ	LLU	—	—	0.053
12	21	5	0.3	1.920	1.040	195	106	29 000	35 000	6801	ZZ	LLU	—	—	0.006
	24	6	0.3	2.890	1.460	295	149	27 000	32 000	6901	ZZ	LLU	—	—	0.011
	28	8	0.3	5.100	2.390	520	244	26 000	30 000	6001	ZZ	LLU	—	—	0.021
	32	10	0.6	6.100	2.750	620	280	22 000	26 000	6201	ZZ	LLU	—	NR	0.037
	37	12	1.0	9.700	4.200	990	425	20 000	24 000	6301	ZZ	LLU	—	—	0.060
15	24	5	0.3	2.080	1.260	212	128	26 000	31 000	6802	ZZ	LLU	—	—	0.007
	28	7	0.3	3.650	2.000	375	204	24 000	28 000	6902	ZZ	LLU	—	—	0.016
	32	9	0.3	5.600	2.830	570	289	22 000	26 000	6002	ZZ	LLU	—	—	0.030
	35	11	0.6	7.750	3.600	790	365	19 000	23 000	6202	ZZ	LLU	—	—	0.045
	42	13	1.0	11.400	5.450	1 170	555	17 000	21 000	6302	ZZ	LLU	—	—	0.082
17	26	5	0.3	2.230	1.460	227	149	24 000	28 000	6803	ZZ	LLU	—	—	0.008
	30	7	0.3	4.650	2.580	475	263	22 000	26 000	6903	ZZ	LLU	—	—	0.018
	35	8	0.3	6.800	3.350	695	345	20 000	24 000	16003	—	—	—	—	0.032
	35	10	0.3	6.800	3.350	695	345	20 000	24 000	6003	ZZ	LLU	—	—	0.039
	40	12	0.6	9.600	4.600	980	465	18 000	21 000	6203	ZZ	LLU	—	—	0.066
	47	14	1.0	13.500	6.550	1 380	665	16 000	19 000	6303	ZZ	LLU	—	—	0.115
	62	17	1.1	22.700	10.800	2 320	1 100	14 000	16 000	6403	ZZ	LLU	—	—	0.270
20	32	7	0.3	4.000	2.470	410	252	21 000	25 000	6804	ZZ	LLU	—	—	0.019
	37	9	0.3	6.400	3.700	650	375	19 000	23 000	6904	ZZ	LLU	—	—	0.036
	42	8	0.3	7.900	4.500	810	455	18 000	21 000	16004	—	—	—	—	0.051
	42	12	0.6	9.400	5.050	955	515	18 000	21 000	6004	ZZ	LLU	—	—	0.069
	47	14	1.0	12.800	6.650	1 310	680	16 000	18 000	6204	ZZ	LLU	—	NR	0.106
	52	15	1.1	15.900	7.900	1 620	805	14 000	17 000	6304	ZZ	LLU	N	NR	0.144
	72	19	1.1	28.500	13.900	2 900	1 420	12 000	14 000	6404	—	—	—	—	0.400
22	44	12	0.6	9.400	5.050	955	515	17 000	20 000	60/22	ZZ	LLU	—	—	0.074
	50	14	1.0	12.900	6.800	1 320	690	14 000	17 000	62/22	ZZ	LLU	—	—	0.117
	56	16	1.1	18.400	9.250	1 880	945	13 000	15 000	63/22	ZZ	LLU	—	—	0.176


Deep Groove Ball Bearings

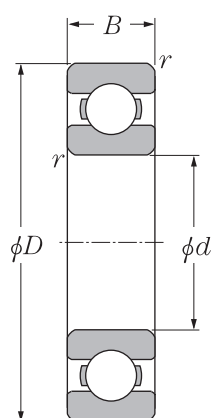


Open type




Shielded type
(ZZ)



Contact
sealed type
(LLU)




With snap
ring groove




With snap ring

d 25~40mm


d	Boundary dimensions			Basic load ratings				Limiting speeds		Bearing numbers					Mass kg (approx.)
	mm			dynamic	static	dynamic	static	min ⁻¹		open type	shielded type	sealed type	snap ring groove	snap ring	
	D	B	r _{s min}	C _r	C _{or}	C _r	C _{or}	grease	oil						
25	37	7	0.3	4.300	2.950	435	300	18 000	21 000	6805	ZZ	LLU	—	—	0.022
	42	9	0.3	7.050	4.550	715	460	16 000	19 000	6905	ZZ	LLU	—	—	0.042
	47	8	0.3	8.350	5.100	855	520	15 000	18 000	16005	—	—	—	—	0.060
	47	12	0.6	10.100	5.850	1 030	595	15 000	18 000	6005	ZZ	LLU	—	—	0.080
	52	15	1.0	14.000	7.850	1 430	800	13 000	15 000	6205	ZZ	LLU	—	NR	0.128
	62	17	1.1	21.200	10.900	2 160	1 110	12 000	14 000	6305	ZZ	LLU	—	NR	0.232
	80	21	1.5	34.500	17.500	3 550	1 780	10 000	12 000	6405	ZZ	—	—	—	0.530
28	52	12	0.6	12.500	7.400	1 270	755	14 000	16 000	60/28	ZZ	LLU	—	—	0.098
	58	16	1.0	17.900	9.750	1 830	995	12 000	14 000	62/28	ZZ	LLU	—	—	0.171
	68	18	1.1	26.700	14.000	2 730	1 430	11 000	13 000	63/28	ZZ	LLU	—	NR	0.284
30	42	7	0.3	4.700	3.650	480	370	15 000	18 000	6806	ZZ	LLU	—	—	0.026
	47	9	0.3	7.250	5.000	740	510	14 000	17 000	6906	ZZ	LLU	—	—	0.048
	55	9	0.3	11.200	7.350	1 150	750	13 000	15 000	16006	—	—	—	—	0.091
	55	13	1.0	13.200	8.300	1 350	845	13 000	15 000	6006	ZZ	LLU	—	—	0.116
	62	16	1.0	19.500	11.300	1 980	1 150	11 000	13 000	6206	ZZ	LLU	—	NR	0.199
	72	19	1.1	26.700	15.000	2 720	1 530	10 000	12 000	6306	ZZ	LLU	N	NR	0.360
	90	23	1.5	43.500	23.900	4 400	2 440	8 800	10 000	6406	—	—	—	—	0.735
32	58	13	1.0	11.800	8.050	1 200	820	12 000	15 000	60/32	ZZ	LLU	—	—	0.129
	65	17	1.0	20.700	11.600	2 110	1 190	11 000	12 000	62/32	ZZ	LLU	—	—	0.226
	75	20	1.1	29.800	16.900	3 050	1 730	9 500	11 000	63/32	ZZ	LLU	—	NR	0.382
35	47	7	0.3	4.900	4.050	500	410	13 000	16 000	6807	ZZ	LLU	—	—	0.029
	55	10	0.6	9.550	6.850	975	695	12 000	15 000	6907	ZZ	LLU	—	—	0.074
	62	9	0.3	11.700	8.200	1 190	835	12 000	14 000	16007	—	—	—	—	0.110
	62	14	1.0	16.000	10.300	1 630	1 050	12 000	14 000	6007	ZZ	LLU	—	—	0.155
	72	17	1.1	25.700	15.300	2 620	1 560	9 800	11 000	6207	ZZ	LLU	—	NR	0.288
	80	21	1.5	33.500	19.100	3 400	1 950	8 800	10 000	6307	ZZ	LLU	—	NR	0.457
	100	25	1.5	55.000	31.000	5 600	3 150	7 800	9 100	6407	—	—	—	—	0.952
40	52	7	0.3	5.100	4.400	520	445	12 000	14 000	6808	ZZ	LLU	—	—	0.033
	62	12	0.6	12.200	8.900	1 240	910	11 000	13 000	6908	ZZ	LLU	—	—	0.110
	68	9	0.3	12.600	9.650	1 290	985	10 000	12 000	16008	—	—	—	—	0.125
	68	15	1.0	16.800	11.500	1 710	1 170	10 000	12 000	6008	ZZ	LLU	—	—	0.190
	80	18	1.1	29.100	17.800	2 970	1 820	8 700	10 000	6208	ZZ	LLU	—	NR	0.366
	90	23	1.5	40.500	24.000	4 150	2 450	7 800	9 200	6308	ZZ	LLU	—	NR	0.630
	110	27	2.0	63.500	36.500	6 500	3 750	7 000	8 200	6408	—	—	—	—	1.230

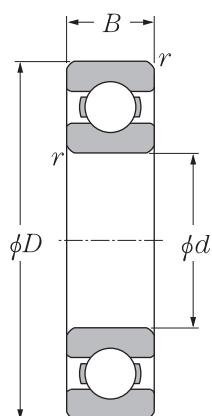


Open type




Shielded type
(ZZ)



Contact
sealed type
(LLU)



With snap
ring groove




With snap ring

d 45~65mm


Boundary dimensions				Basic load ratings				Limiting speeds		Bearing numbers					Mass
mm				dynamic	static	dynamic	static	min ⁻¹							kg
d	D	B	r _{s min}	C _r	C _{or}	C _r	C _{or}	grease	oil	open type	shielded type	sealed type	snap ring groove	snap ring	(approx.)
45	58	7	0.3	5.350	4.950	550	500	11 000	12 000	6809	ZZ	LLU	—	—	0.040
	68	12	0.6	13.100	10.400	1 330	1 060	9 800	12 000	6909	ZZ	LLU	—	—	0.128
	75	10	0.6	12.900	10.500	1 320	1 070	9 200	11 000	16009	—	—	—	—	0.171
	75	16	1.0	21.000	15.100	2 140	1 540	9 200	11 000	6009	ZZ	LLU	—	—	0.237
	85	19	1.1	32.500	20.400	3 350	2 080	7 800	9 200	6209	ZZ	LLU	—	—	0.398
	100	25	1.5	53.000	32.000	5 400	3 250	7 000	8 200	6309	ZZ	LLU	—	NR	0.814
	120	29	2.0	77.000	45.000	7 850	4 600	6 300	7 400	6409	ZZ	—	—	—	1.530
50	65	7	0.3	6.600	6.100	670	620	9 600	11 000	6810	ZZ	LLU	—	—	0.052
	72	12	0.6	13.400	11.200	1 370	1 140	8 900	11 000	6910	ZZ	LLU	—	—	0.132
	80	10	0.6	13.200	11.300	1 350	1 150	8 400	9 800	16010	—	—	—	—	0.180
	80	16	1.0	21.800	16.600	2 230	1 690	8 400	9 800	6010	ZZ	LLU	—	—	0.261
	90	20	1.1	35.000	23.200	3 600	2 370	7 100	8 300	6210	ZZ	LLU	N	NR	0.454
	110	27	2.0	62.000	38.500	6 300	3 900	6 400	7 500	6310	ZZ	LLU	N	NR	1.070
	130	31	2.1	83.000	49.500	8 450	5 050	5 700	6 700	6410	—	—	—	NR	1.880
55	72	9	0.3	8.800	8.100	900	825	8 700	10 000	6811	ZZ	LLU	—	—	0.083
	80	13	1.0	16.000	13.300	1 630	1 350	8 200	9 600	6911	ZZ	LLU	—	—	0.180
	90	11	0.6	18.600	15.300	1 900	1 560	7 700	9 000	16011	—	—	—	—	0.258
	90	18	1.1	28.300	21.200	2 880	2 170	7 700	9 000	6011	ZZ	LLU	—	—	0.388
	100	21	1.5	43.500	29.200	4 450	2 980	6 400	7 600	6211	ZZ	LLU	—	NR	0.601
	120	29	2.0	71.500	45.000	7 300	4 600	5 800	6 800	6311	ZZ	LLU	—	NR	1.370
	140	33	2.1	89.000	54.000	9 050	5 500	5 200	6 100	6411	—	—	N	—	2.290
60	78	10	0.3	11.500	10.600	1 170	1 080	8 000	9 400	6812	ZZ	LLU	—	—	0.106
	85	13	1.0	16.400	14.300	1 670	1 450	7 600	8 900	6912	ZZ	LLU	—	—	0.193
	95	11	0.6	20.000	17.500	2 040	1 780	7 000	8 300	16012	—	—	—	—	0.283
	95	18	1.1	29.500	23.200	3 000	2 370	7 000	8 300	6012	ZZ	LLU	—	—	0.414
	110	22	1.5	52.500	36.000	5 350	3 700	6 000	7 000	6212	ZZ	LLU	—	NR	0.783
	130	31	2.1	82.000	52.000	8 350	5 300	5 400	6 300	6312	ZZ	LLU	—	NR	1.730
	150	35	2.1	102.000	64.500	10 400	6 550	4 800	5 700	6412	—	—	N	NR	2.770
65	85	10	0.6	11.600	11.000	1 180	1 120	7 400	8 700	6813	ZZ	LLU	—	—	0.128
	90	13	1.0	17.400	16.100	1 770	1 640	7 000	8 200	6913	ZZ	LLU	—	—	0.206
	100	11	0.6	20.500	18.700	2 090	1 910	6 500	7 700	16013	—	—	—	—	0.307
	100	18	1.1	30.500	25.200	3 100	2 570	6 500	7 700	6013	ZZ	LLU	—	—	0.421
	120	23	1.5	57.500	40.000	5 850	4 100	5 500	6 500	6213	ZZ	LLU	—	—	0.990
	140	33	2.1	92.500	60.000	9 450	6 100	4 900	5 800	6313	ZZ	LLU	—	—	2.080
	160	37	2.1	111.000	72.500	11 300	7 400	4 400	5 200	6413	—	—	—	—	3.300

Deep Groove Ball Bearings


KYK

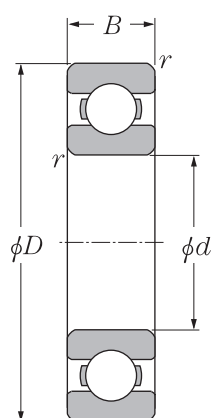


Open type




Shielded type
(ZZ)



Contact
sealed type
(LLU)




With snap
ring groove




With snap ring

d 70~90mm


d	Boundary dimensions			Basic load ratings				Limiting speeds		Bearing numbers					Mass kg (approx.)
	mm			dynamic	static	dynamic	static	min ⁻¹		open type	shielded type	sealed type	snap ring groove	snap ring	
	D	B	r _{s min}	C _r	C _{or}	C _r	C _{or}	grease	oil						
70	90	10	0.6	12.100	11.900	1 230	1 220	6 900	8 100	6814	ZZ	LLU	—	—	0.137
	100	16	1.0	23.700	21.200	2 420	2 160	6 500	7 700	6914	ZZ	LLU	—	—	0.334
	110	13	0.6	24.400	22.600	2 480	2 300	6 100	7 100	16014	—	—	—	—	0.441
	110	20	1.1	38.000	31.000	3 900	3 150	6 100	7 100	6014	ZZ	LLU	—	—	0.604
	125	24	1.5	62.000	44.000	6 350	4 500	5 100	6 000	6214	ZZ	LLU	—	—	1.070
	150	35	2.1	104.000	68.000	10 600	6 950	4 600	5 400	6314	ZZ	LLU	—	NR	2.520
	180	42	3.0	128.000	89.500	13 100	9 100	4 100	4 800	6414	—	—	—	—	4.830
75	95	10	0.6	12.500	12.900	1 280	1 310	6 400	7 600	6815	ZZ	LLU	—	—	0.145
	105	16	1.0	24.400	22.600	2 480	2 300	6 100	7 200	6915	ZZ	LLU	—	—	0.353
	115	13	0.6	25.000	24.000	2 540	2 450	5 700	6 700	16015	—	—	—	—	0.464
	115	20	1.1	39.500	33.500	4 050	3 400	5 700	6 700	6015	ZZ	LLU	—	—	0.649
	130	25	1.5	66.000	49.500	6 750	5 050	4 800	5 600	6215	ZZ	LLU	—	—	1.180
	160	37	2.1	113.000	77.000	11 600	7 850	4 300	5 000	6315	ZZ	LLU	—	—	3.020
	190	45	3.0	138.000	99.000	14 000	10 100	3 800	4 500	6415	—	—	—	—	5.720
80	100	10	0.6	12.700	13.300	1 290	1 360	6 000	7 100	6816	ZZ	LLU	—	—	0.154
	110	16	1.0	24.900	24.000	2 540	2 450	5 700	6 700	6916	ZZ	LLU	—	—	0.373
	125	14	0.6	25.400	25.100	2 590	2 560	5 300	6 200	16016	—	—	—	—	0.597
	125	22	1.1	47.500	40.000	4 850	4 050	5 300	6 200	6016	ZZ	LLU	—	—	0.854
	140	26	2.0	72.500	53.000	7 400	5 400	4 500	5 300	6216	ZZ	LLU	—	—	1.400
	170	39	2.1	123.000	86.500	12 500	8 850	4 000	4 700	6316	ZZ	LLU	—	—	3.590
	200	48	3.0	164.000	125.000	16 700	12 800	3 600	4 200	6416	—	—	—	—	6.760
85	110	13	1.0	18.700	19.000	1 910	1 940	5 700	6 700	6817	ZZ	LLU	—	—	0.270
	120	18	1.1	32.000	29.600	3 250	3 000	5 400	6 300	6917	ZZ	LLU	—	—	0.536
	130	14	0.6	25.900	26.200	2 640	2 670	5 000	5 900	16017	—	—	—	—	0.626
	130	22	1.1	49.500	43.000	5 050	4 400	5 000	5 900	6017	ZZ	LLU	—	—	0.890
	150	28	2.0	83.500	64.000	8 500	6 500	4 200	5 000	6217	ZZ	LLU	—	—	1.790
	180	41	3.0	133.000	97.000	13 500	9 850	3 800	4 500	6317	ZZ	LLU	—	—	4.230
90	115	13	1.0	19.000	19.700	1 940	2 010	5 400	6 300	6818	ZZ	LLU	—	—	0.285
	125	18	1.1	33.000	31.500	3 350	3 200	5 100	6 000	6918	ZZ	LLU	—	—	0.554
	140	16	1.0	33.500	33.500	3 400	3 400	4 700	5 600	16018	—	—	—	—	0.848
	140	24	1.5	58.000	49.500	5 950	5 050	4 700	5 600	6018	ZZ	LLU	—	—	1.020
	160	30	2.0	96.000	71.500	9 800	7 300	4 000	4 700	6218	ZZ	LLU	—	—	2.150
	190	43	3.0	143.000	107.000	14 500	10 900	3 600	4 200	6318	ZZ	LLU	—	—	4.910

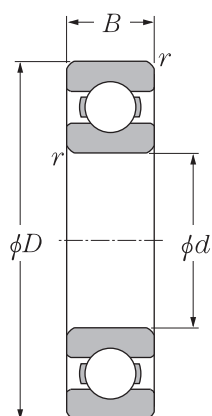


Open type




Shielded type
(ZZ)



Contact
sealed type
(LLU)




With snap
ring groove




With snap ring

d 95~130mm


d	Boundary dimensions			Basic load ratings				Limiting speeds		Bearing numbers					Mass kg (approx.)
	mm			dynamic	static	dynamic	static	min ⁻¹		open type	shielded type	sealed type	snap ring groove	snap ring	
	D	B	r _{s min}	C _r	C _{or}	C _r	C _{or}	grease	oil						
95	120	13	1.0	19.300	20.500	1 970	2 090	5 000	5 900	6819	ZZ	LLU	—	—	0.300
	130	18	1.1	33.500	33.500	3 450	3 400	4 800	5 700	6919	ZZ	LLU	—	—	0.579
	145	16	1.0	34.500	35.000	3 500	3 550	4 500	5 300	16019	—	—	—	—	0.885
	145	24	1.5	60.500	54.000	6 150	5 500	4 500	5 300	6019	ZZ	LLU	—	—	1.080
	170	32	2.1	109.000	82.000	11 100	8 350	3 700	4 400	6219	ZZ	LLU	—	—	2.620
	200	45	3.0	153.000	119.000	15 600	12 100	3 300	3 900	6319	ZZ	—	—	—	5.670
100	125	13	1.0	19.600	21.200	2 000	2 160	4 800	5 600	6820	ZZ	LLU	—	—	0.313
	140	20	1.1	41.000	39.500	4 200	4 050	4 500	5 300	6920	ZZ	LLU	—	—	0.785
	150	16	1.0	35.000	36.500	3 600	3 750	4 200	5 000	16020	—	—	—	—	0.910
	150	24	1.5	60.000	54.000	6 150	5 500	4 200	5 000	6020	ZZ	LLU	—	—	1.150
	180	34	2.1	122.000	93.000	12 500	9 450	3 500	4 200	6220	ZZ	LLU	—	—	3.140
	215	47	3.0	173.000	141.000	17 600	14 400	3 200	3 700	6320	ZZ	—	—	—	7.000
105	130	13	1.0	19.800	22.000	2 020	2 240	4 600	5 400	6821	—	—	—	—	0.330
	145	20	1.1	42.500	42.000	4 300	4 300	4 300	5 100	6921	ZZ	LLU	—	—	0.816
	160	18	1.0	52.000	50.500	5 300	5 150	4 000	4 700	16021	—	—	—	—	1.200
	160	26	2.0	72.500	65.500	7 400	6 700	4 000	4 700	6021	ZZ	LLU	—	—	1.590
	190	36	2.1	133.000	105.000	13 600	10 700	3 400	4 000	6221	ZZ	—	—	—	3.700
	225	49	3.0	184.000	153.000	18 700	15 700	3 000	3 600	6321	ZZ	—	—	—	8.050
110	140	16	1.0	24.900	28.200	2 540	2 880	4 300	5 100	6822	—	—	—	—	0.515
	150	20	1.1	43.500	44.500	4 450	4 550	4 100	4 800	6922	ZZ	LLU	—	—	0.849
	170	19	1.0	57.500	56.500	5 850	5 800	3 800	4 500	16022	—	—	—	—	1.460
	170	28	2.0	82.000	73.000	8 350	7 450	3 800	4 500	6022	ZZ	LLU	—	—	1.960
	200	38	2.1	144.000	117.000	14 700	11 900	3 200	3 800	6222	ZZ	—	—	—	4.360
	240	50	3.0	205.000	179.000	20 900	18 300	2 900	3 400	6322	ZZ	—	—	—	9.540
120	150	16	1.0	28.900	33.000	2 950	3 350	4 000	4 700	6824	—	—	—	—	0.555
	165	22	1.1	53.000	54.000	5 400	5 500	3 800	4 400	6924	—	—	—	—	1.150
	180	19	1.0	63.000	63.500	6 450	6 450	3 500	4 100	16024	—	—	—	—	1.560
	180	28	2.0	85.000	79.500	8 650	8 100	3 500	4 100	6024	ZZ	LLU	—	—	2.070
	215	40	2.1	155.000	131.000	15 900	13 400	2 900	3 400	6224	ZZ	LLU	—	—	5.150
	260	55	3.0	207.000	185.000	21 100	18 800	2 600	3 100	6324	—	—	—	—	12.400
130	165	18	1.1	37.000	41.000	3 750	4 200	3 700	4 300	6826	—	—	—	—	0.800
	180	24	1.5	65.000	67.500	6 650	6 850	3 500	4 100	6926	—	—	—	—	1.520
	200	22	1.1	80.000	79.500	8 150	8 100	3 200	3 800	16026	—	—	—	—	2.310

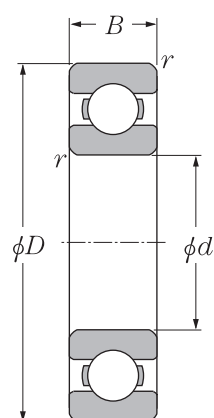


Open type




Shielded type
(ZZ)



Contact
sealed type
(LLU)



With snap
ring groove



With snap ring

d 130~150mm

d	Boundary dimensions			Basic load ratings				Limiting speeds		Bearing numbers					Mass kg (approx.)
	mm			dynamic	static	dynamic	static	grease	oil	open type	shielded type	sealed type	snap ring groove	snap ring	
	D	B	r _{s min}	C _r	C _{or}	C _r	C _{or}								
130	200	33	2.0	106.000	101.000	10 800	10 300	3 200	3 800	6026	ZZ	LLU	—	—	3.160
	230	40	3.0	167.000	146.000	17 000	14 900	2 700	3 100	6226	—	—	—	—	5.820
	280	58	4.0	229.000	214.000	23 400	21 800	2 400	2 800	6326	—	—	—	—	15.300
140	175	18	1.1	38.500	44.500	3 900	4 550	3 400	4 000	6828	—	—	—	—	0.850
	190	24	1.5	66.500	71.500	6 800	7 300	3 200	3 800	6928	—	—	—	—	1.620
	210	22	1.1	82.000	85.000	8 350	8 650	3 000	3 500	16028	—	—	—	—	2.450
	210	33	2.0	110.000	109.000	11 200	11 100	3 000	3 500	6028	ZZ	LLU	—	—	3.350
	250	42	3.0	166.000	150.000	17 000	15 300	2 500	2 900	6228	—	—	—	—	7.570
	300	62	4.0	253.000	246.000	25 800	25 100	2 200	2 600	6328	—	—	—	—	18.500
150	190	20	1.1	47.500	55.000	4 850	5 600	3 100	3 700	6830	—	—	—	—	1.160
	210	28	2.0	85.000	90.500	8 650	9 200	3 000	3 500	6930	—	—	—	—	2.470
	225	24	1.1	96.500	101.000	9 850	10 300	2 800	3 200	16030	—	—	—	—	3.070
	225	35	2.1	126.000	126.000	12 800	12 800	2 800	3 200	6030	ZZ	LLU	—	—	4.080
	270	45	3.0	176.000	168.000	18 000	17 100	2 300	2 700	6230	—	—	—	—	9.410
	320	65	4.0	274.000	284.000	28 000	28 900	2 100	2 400	6330	—	—	—	—	22.000